

# Installing A USB Jump Drive Into GreenFeed For Configuring Wi-Fi


You will need:

- 1) A USB Jump Drive that has been formatted at FAT 4GB or smaller
- 2) A #2 Phillips Screwdriver

# Loosen The Six Latches On The Back Of GreenFeed




# Lift The Air Filter Hatch and Remove The Bottom Hatch

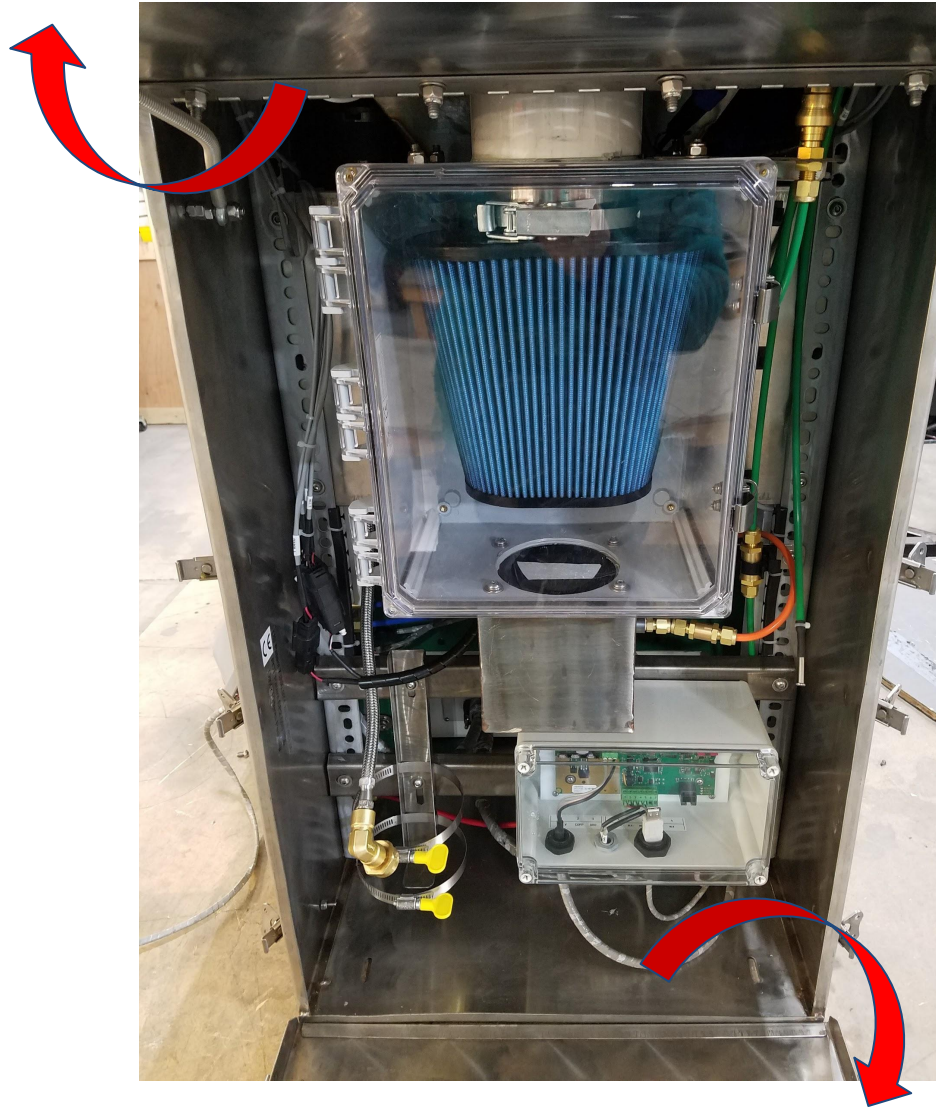

# Remove The RFID Reader Box Cover

Use a Phillips Screwdriver to loosen the 4 plastic screws of the lid.

Remove the lid to expose the USB plug.

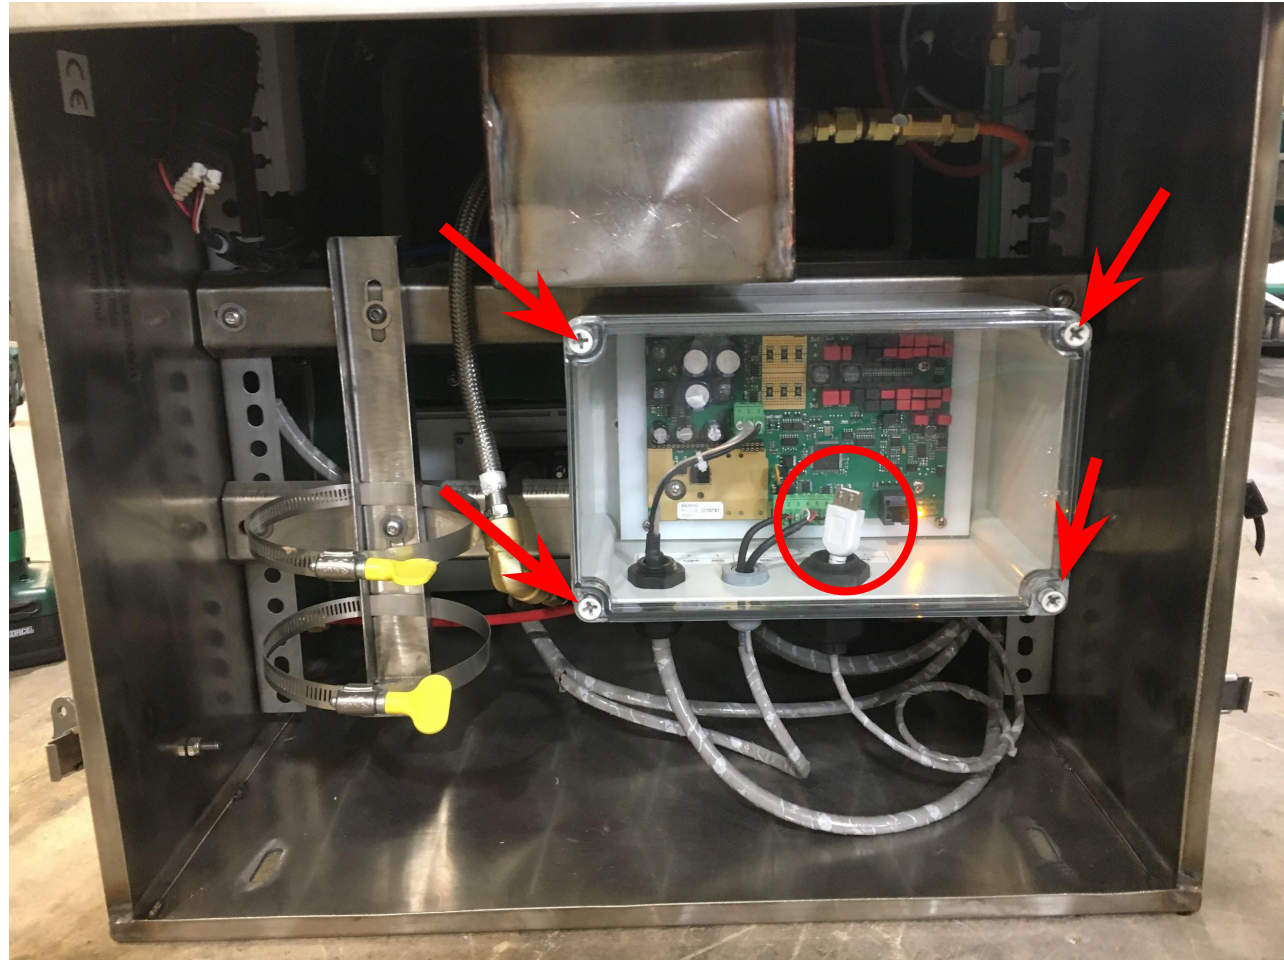

# Insert The USB Jump Drive



# Shut Off GreenFeed

- Put the unit to sleep – From the main status screen, press SLEEP, then press ENTER to put the unit to sleep.
- Wait for data to upload – then press the “PWROFF” button
- Wait 30 seconds, then unplug main power from the unit.

# Restart GreenFeed

- Turn the unit back on
- Once the main screen is displayed, wait 2 minute
- The jump drive is read once every minute (at the 00 second mark). So waiting 2 minutes will give it ample time to read the jump drive.
- Check if the unit is online. If it is not, try cycling power on the system.

# Remove The Jump Drive

- 1) Remove the USB jump drive
- 2) Put the lid cover back on and tighten the screws
- 3) Put the bottom hatch back on
- 4) Close the air filter box hatch
- 5) Tighten all 6 latches